
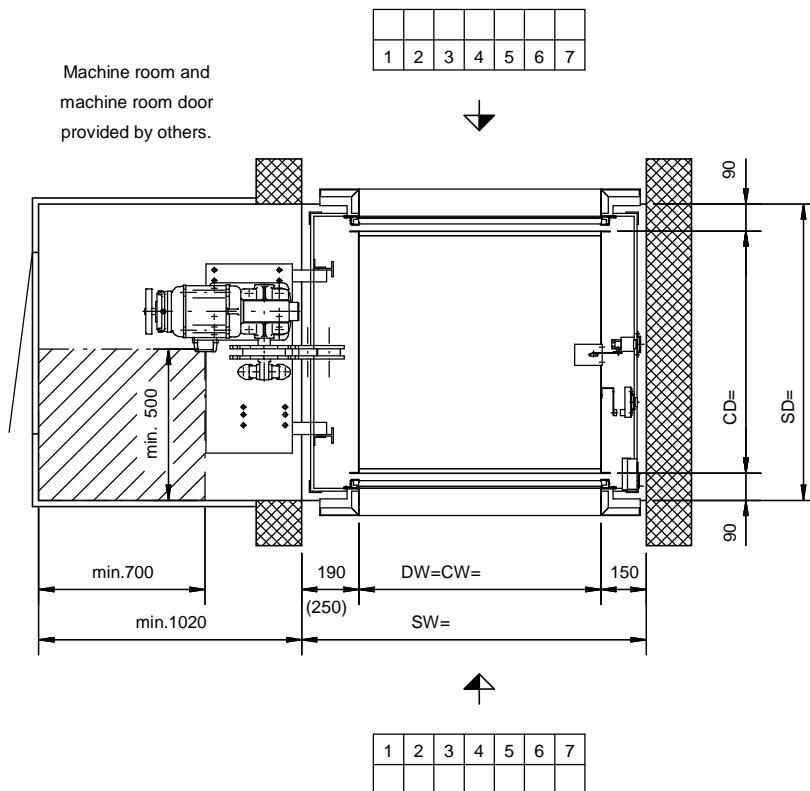


1) This Data Sheet is for planning purposes only. An accurate layout drawing will be provided on receipt of an order.

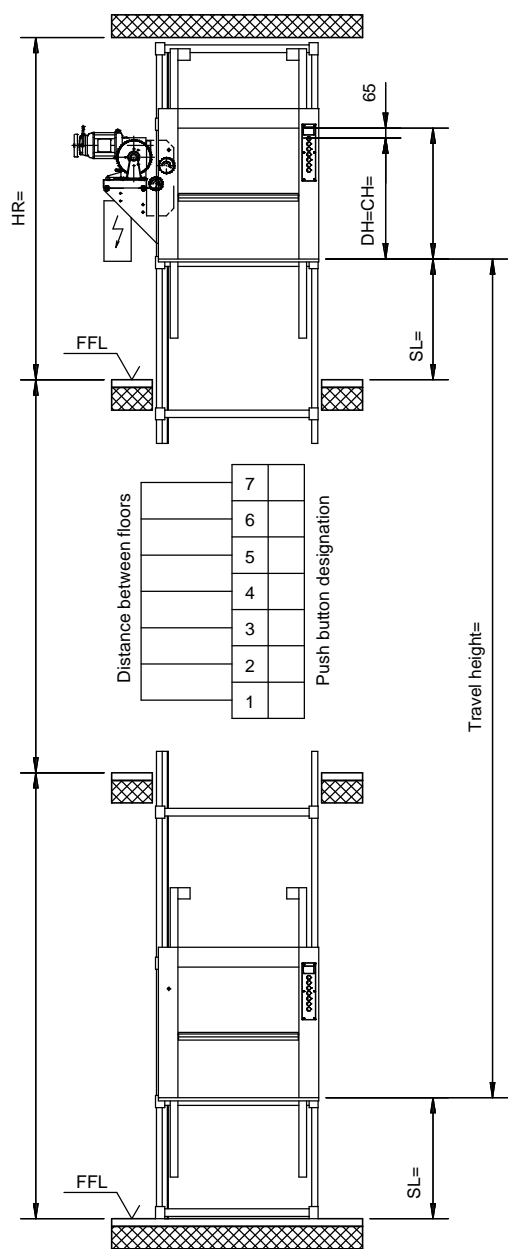

() - Dimensions if execution with safety gear

All dimensions are in mm, and are subject to modification.

The shaft must be rectangular and perpendicular. Maximum admissible deviation from plumb is +20 mm -0 mm. All dimensions are minimum dimensions.

Q	v	BKG	Layout drawing no.	Car dimensions					Headroom HR min.	Floor distance min.	Sill height SL=min.
				CW= min. max.	CD= min. max.	size alt.	CH= min. max.	size alt.			
100	0,30	100.45/27	5-62700-0007	400	500	50	600	100	SL+(1,5xDH)+250	2 x DH + 330, same sill height	Sill height at lowest floor =DH/2+130, however min. as all others 700.
		100.45/27F	5-62710-0004	1000	1000		1200		SL+(1,5xDH)+250 but min. SL+CH+750		
				* CH min. CW + 200							
Part No.				Edition							
5-60002-0209				04/2015							