

Inquiry form

To: Sales Dept.
From:

Date:
Your Ref.:

Basic information: BKG Type: Safety gear (accessible space below): No
Shaft size: Width: mm Depth: mm Shaft material: Not clear yet

Car size: Width: mm Depth: mm Height: mm

Position of machine: Capacity: No. of stops/doors: /
 top 50 kg 500 kg
 bottom 100 kg 750 kg
 side top 300 kg 1000 kg
 side bottom 2000 kg
 Travel: mm
 Headroom: mm
 Pit depth: mm
 Service height: mm

Connection voltage: Ph. V / Hz with N Speed m/s

Car:

Material:


- Zintec
 Galvanised
 Brushed st. st. (AISI430)
 Brushed st. st. (AISI304)

No. of shelves:

Entrance protection

- Roller shutter aluminium Continuous load guard galvanised
 Roller shutter st. st. Continuous load guard st.st.
 Vertical bi-parting door Load guard plates galvanised
 Load guard edges Load guard plates st.st.
 Diagonal drop bar Inclining car floor
 Not required

Shaft doors:

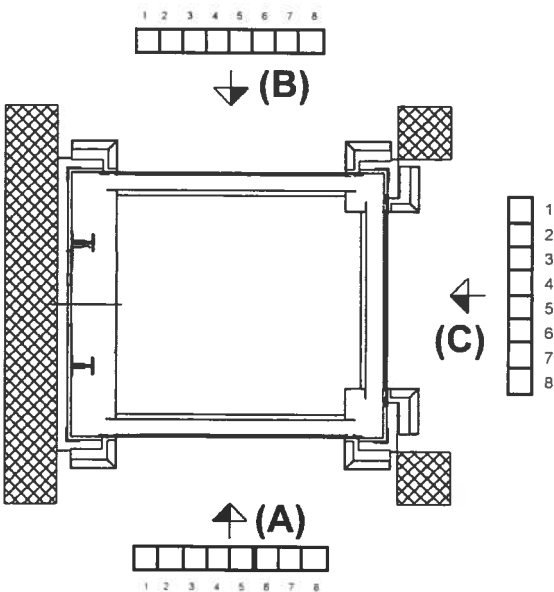

- Type of door:
 Vertical bi-parting
 Hinged door
 Combination door

- Execution:
 Single-skinned
 Double-skinned

- Surface:
 Zinc coated
 Galvanised
 Brushed stainless steel (AISI 430)
 Brushed stainless steel (AISI 304)
 Any other finish on request!

Failure lock device required (unrestricted / public area)

For an overview of the lift types and drawings please visit

Inquiry form

Machine room door:

Material:

- | | |
|--|---|
| <input type="checkbox"/> Zintec | <input type="checkbox"/> Single-skinned |
| <input type="checkbox"/> Galvanised | <input type="checkbox"/> Double-skinned |
| <input type="checkbox"/> Brushed st. st. (AISI430) | |
| <input type="checkbox"/> Brushed st. st. (AISI304) | |
| <input type="checkbox"/> Machine room ladder | |

Fire-rating for doors

- | | |
|--|---------------------|
| <input type="checkbox"/> No fire-rating | |
| <input type="checkbox"/> DIN18090/DIN18092 | (Germany / 90 min.) |
| <input type="checkbox"/> E120/EW60 | (EN81-58) |
| <input type="checkbox"/> EI60 | (EN81-58) |
| <input type="checkbox"/> E30 | (Russia) |

Optional Extras:

- | | | |
|---|---|--|
| <input type="checkbox"/> Light in car | <input type="checkbox"/> Mortice lock for door | <input type="checkbox"/> Out-of service indicator |
| <input type="checkbox"/> Arrival Gong instead of buzzer | <input type="checkbox"/> Latch type lock for door | <input type="checkbox"/> Travel counter |
| <input type="checkbox"/> Overload device | <input type="checkbox"/> Flashing arrival signal | <input type="checkbox"/> Direction indicator |
| <input type="checkbox"/> Floor heater | <input type="checkbox"/> Switch-off call panel | <input type="checkbox"/> 2-way intercom |
| <input type="checkbox"/> Shelf heater | <input type="checkbox"/> Switch-off complete lift | <input type="checkbox"/> Press-to-talk intercom |
| <input type="checkbox"/> VVVF drive | <input type="checkbox"/> Water protection IP44 | <input type="checkbox"/> Automatic shaft doors
(only vertical-bi parting) |
| <input type="checkbox"/> Explosion-proof | <input type="checkbox"/> Doors with glass panels | |

Please offer including CFR transport by vessel to:

Comments / Additional requirements: