
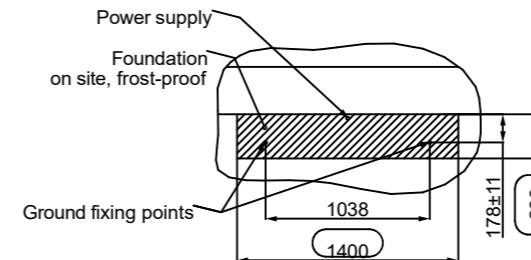


Musterzeichnung1-UnaPorte90_EN_img_2.png

Platform vertical lift UnaPorte90:

Delivery height: 2917 mm
 Platform size: 1400x1100mm
 Load capacity: 385kg
 Color Design: Anodized aluminum + metallic silver
 Color Design: -
 Travel speed: 0.15m/sec.

- Installation location: Internal/External
- Extended access ramp: Yes/No
- Safety contact strip: Front/Opposite car door
- Encryption: Standard Profil cylinder/EuroKey
- Dual COP: No
- Emergency call via GSM voice connection including SMS remote query: Yes/No
- Voice output: Yes/No
- Automatic emergency power supply: Yes/No
- Indirect RGB lighting on the car: Yes/No
- Back wall: Yes/No
- Access below
 Access side: Left/Right
 Version: Car door
 Door stop: Left+DIN-L/Right+DIN-R
 Operation: Door damper/Door drive
- Access at the top
 Access side: H
 Version: Lifting column door
 Door stop: DIN-L/DIN-R
 Operation: Door damper/Door drive
 Execution of transition at top: Standard (0mm)/Transfer plate (200mm)
- External control: 2x radio wall buttons including key switch
- Freestanding pillar(s) for radio wall switch: 2 Stk.

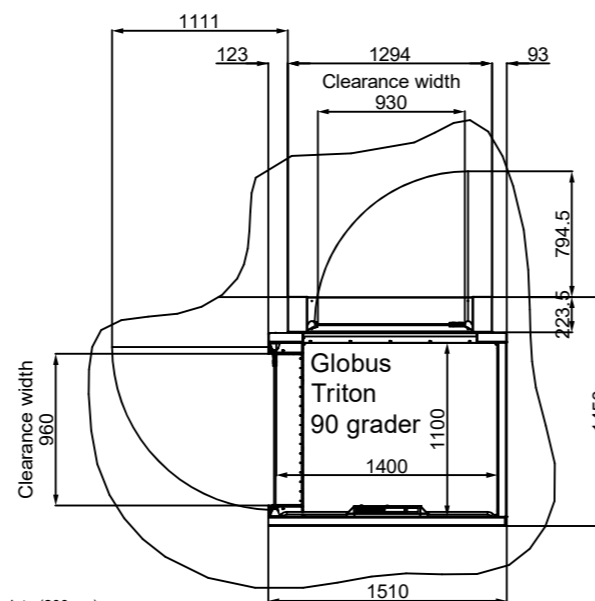

Det.nr	Ant.	Benämning				Referens	Material	Modell nr	Ämnesdim.
Konstr.	Rit.	Konstr.	Stand.	Godk.	Skala	Datum	Där ej annat angivits:		
Konstr	Rit	---	---	---	Skala 1: 1	240605	Tolerans enligt SMS 715		
Globus TT AB		Globur Triton		Genomgång 90 grader		Överordn. Smst.		Cad program	
www.globustt.se		Ritning 515110		A0		XXXXXXX		2002 LT	