

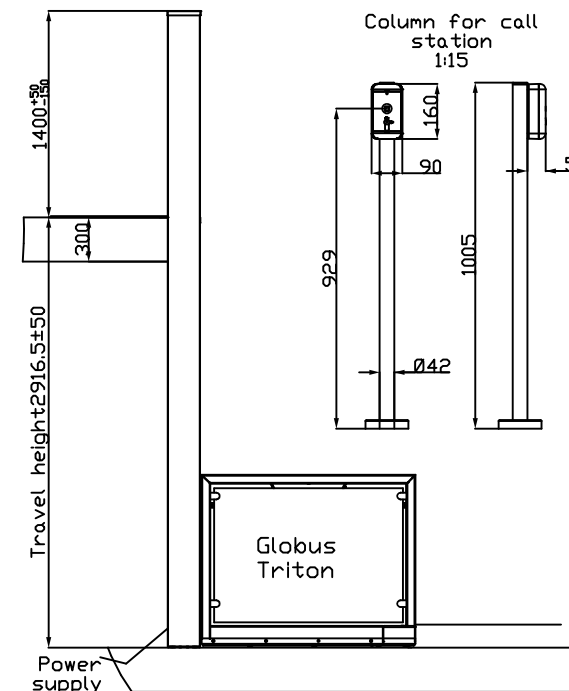
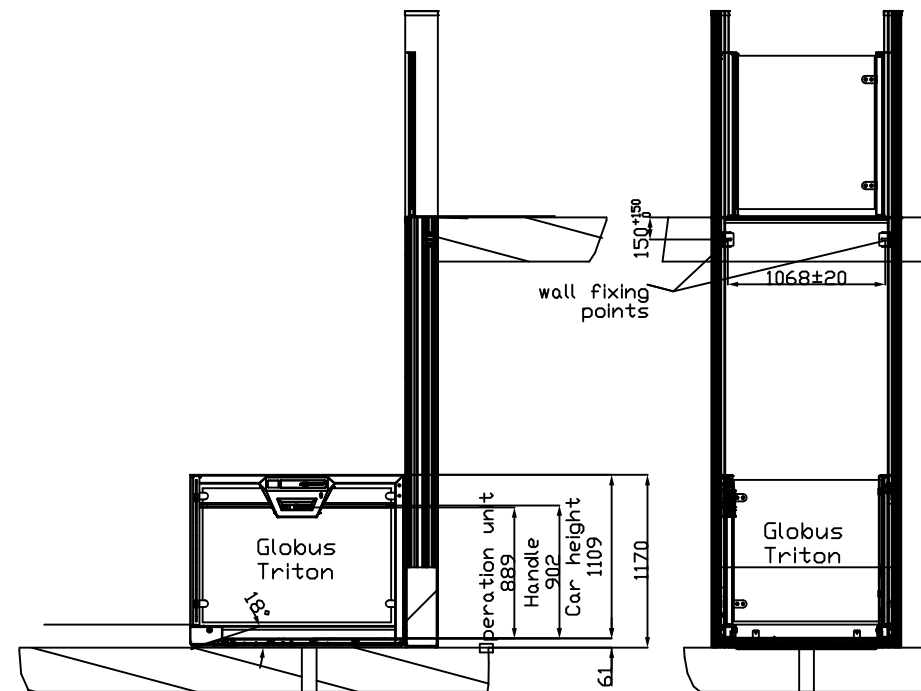


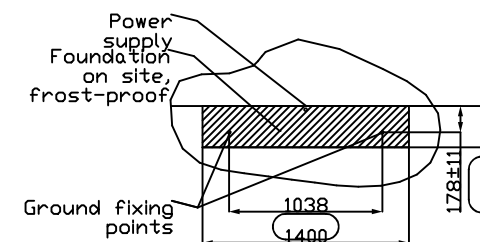

- Platform vertical lift UnaPorte:
- Delivery height: 2917 mm
Platform size: 1400x1100mm
Load capacity: 385kg
Color Design: anodized aluminum + metallic silver
Color Design: -
Travel speed: 0.15m/sec.
- Installation location: Internal/External
 - Extended access ramp: Yes/No
 - Safety contact strip: No/Left/Right/Both sides
 - Encryption: Standard Profil cylinder/EuroKey
 - Dual COP: Yes/No
 - Emergency call via GSM voice connection including SMS remote query: Yes/No
 - Voice output: Yes/No
 - Automatic emergency power supply: Yes/No
 - Indirect RGB lighting on the car: Yes/No
 - Back wall: Yes/No
 - Access below
Access side: V
Version: Car door
Door stop: DIN-L/DIN-R
Operation: door damper/door drive
 - Access at the top
Access side: H
Version: Lifting column door
Door stop: DIN-L/DIN-R
Operation: door damper/door drive
Execution of transition at top: Standard (0mm)/Transfer plate (200mm)
 - External control: 2x radio wall buttons including key switch
 - Freestanding pillar(s) for radio wall switch: 2 Stk.

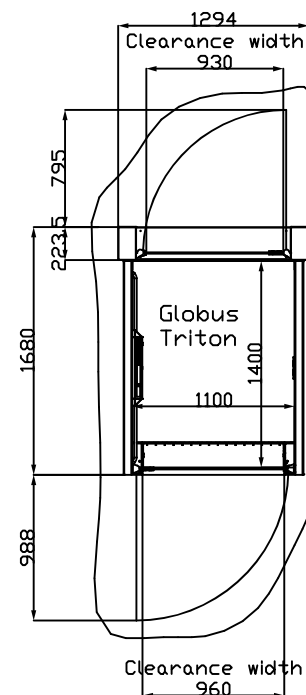

If pit = 80 mm deep

Horizontal force $\square 4$	
Delivery height [mm]	Pull-out force/ Attachment point [kN]
600	8,5
800	5,9
1000	4,5
1200	3,7
1400	3,1
1600	2,7
1800	2,3
2000	2,1
2200	1,9
2400	1,7
2600	1,6
2800	1,5
3000	1,4

Det.nr	Ant.	Benämning	Referens	Material	Modell nr	Ämnesdim.
Konstr.	Rit.	Konstr.	Stand.	Godk.	Skala	Datum
Konstr	Rit	---	---	---	Skala 1: 40	240605
Globus TT AB www.globustt.se						Globus Triton Rak genomgång Ritning 515101
						Där ej annat angivits: Tolerans enligt SMS 715
						Överordn. Smst. Cad program 2002 LT
						A0 XXXXXXXX