

GENERAL

soft start/soft stop via a
frequency-controlled drive system

perfect ratio of space requirement
to usable platform area

no pit required due to ramp

simple retrofitting

385 kg load capacity

up to 0,15 m/s driving speed

1400x1100mm usable platform size

TYPE OF DRIVE

guide chain system with
electric drive 0.75 kW

safety gear with
integrated speed limiter

CONTROL & OPERATION

push-button operation
on the platform /remote controlled
buttons for landing call stations

full graphic color display

integrated fault memory

numerous adjustment parameters

COLOR/DESIGN

platform floor anodised
aluminium tear sheet

car grey aluminum

lifting column anodised aluminium

acendor[®]
LIFTTECHNIK

YOUR CONFIGURATION



PLATFORM

VERTICALLIFT

TYPE: UnaPorte


DATE: 2025-11-06 12.17

PROJECT: Sample drawing



3D view

To activate the interactive 3D view, you must trust this document (see hint on the top) in Adobe Acrobat and click on the question mark.

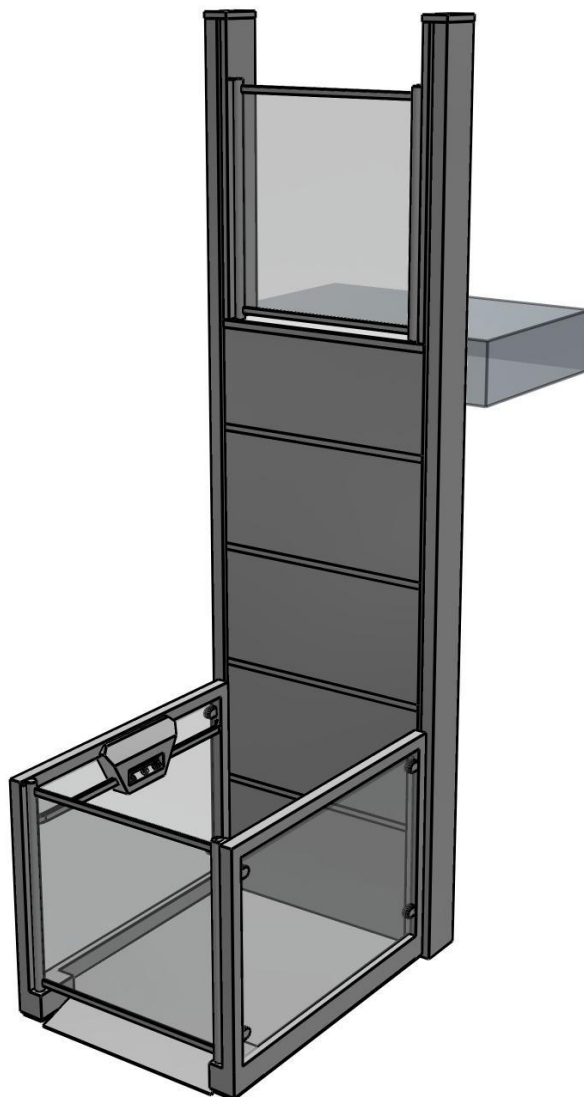

Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.

Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.




2D derivation

travel height [mm]	Extraction force/ Fastening point [kN]
600	8,5
800	5,9
1000	4,5
1250	3,5
1500	2,9
1750	2,4
2000	2,1
2250	1,9
2500	1,7
2750	1,5
3000	1,4
3250	1,3
3500	1,2
3750	1,1
4000	1,0

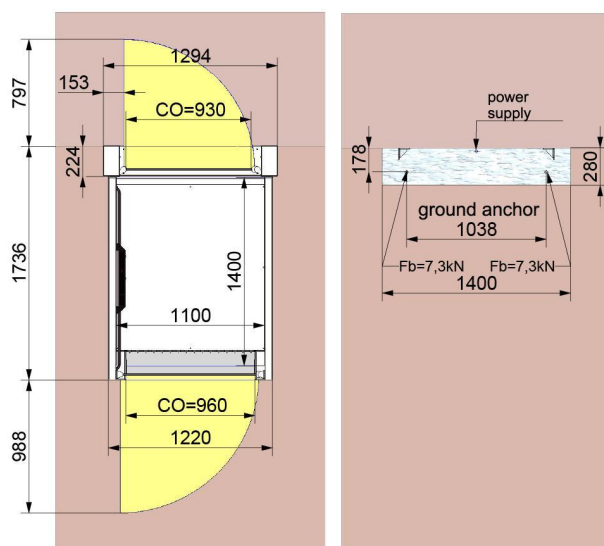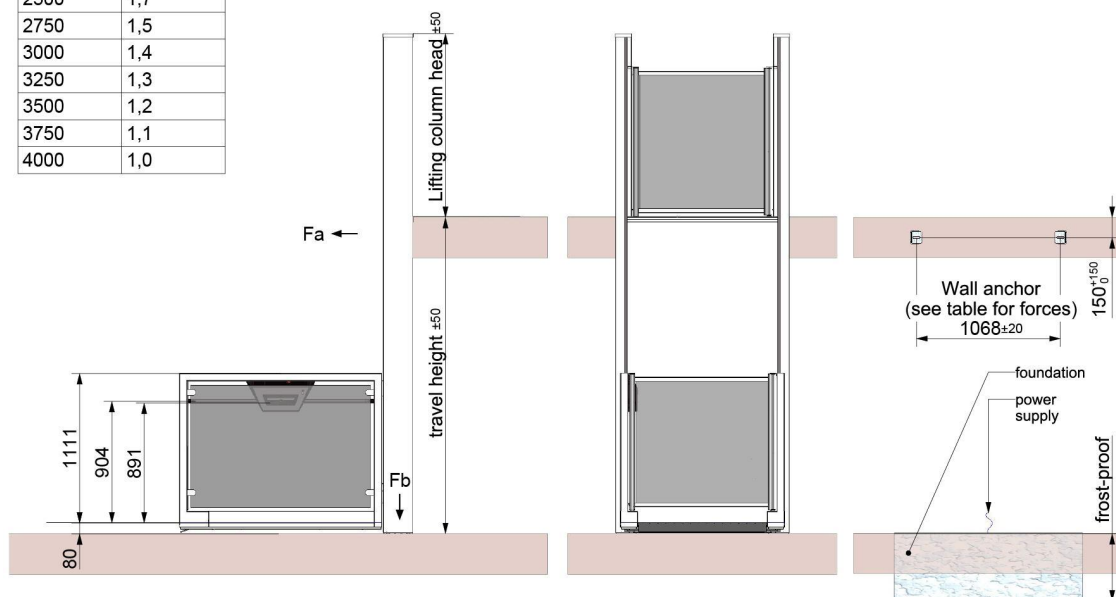



Technical drawings

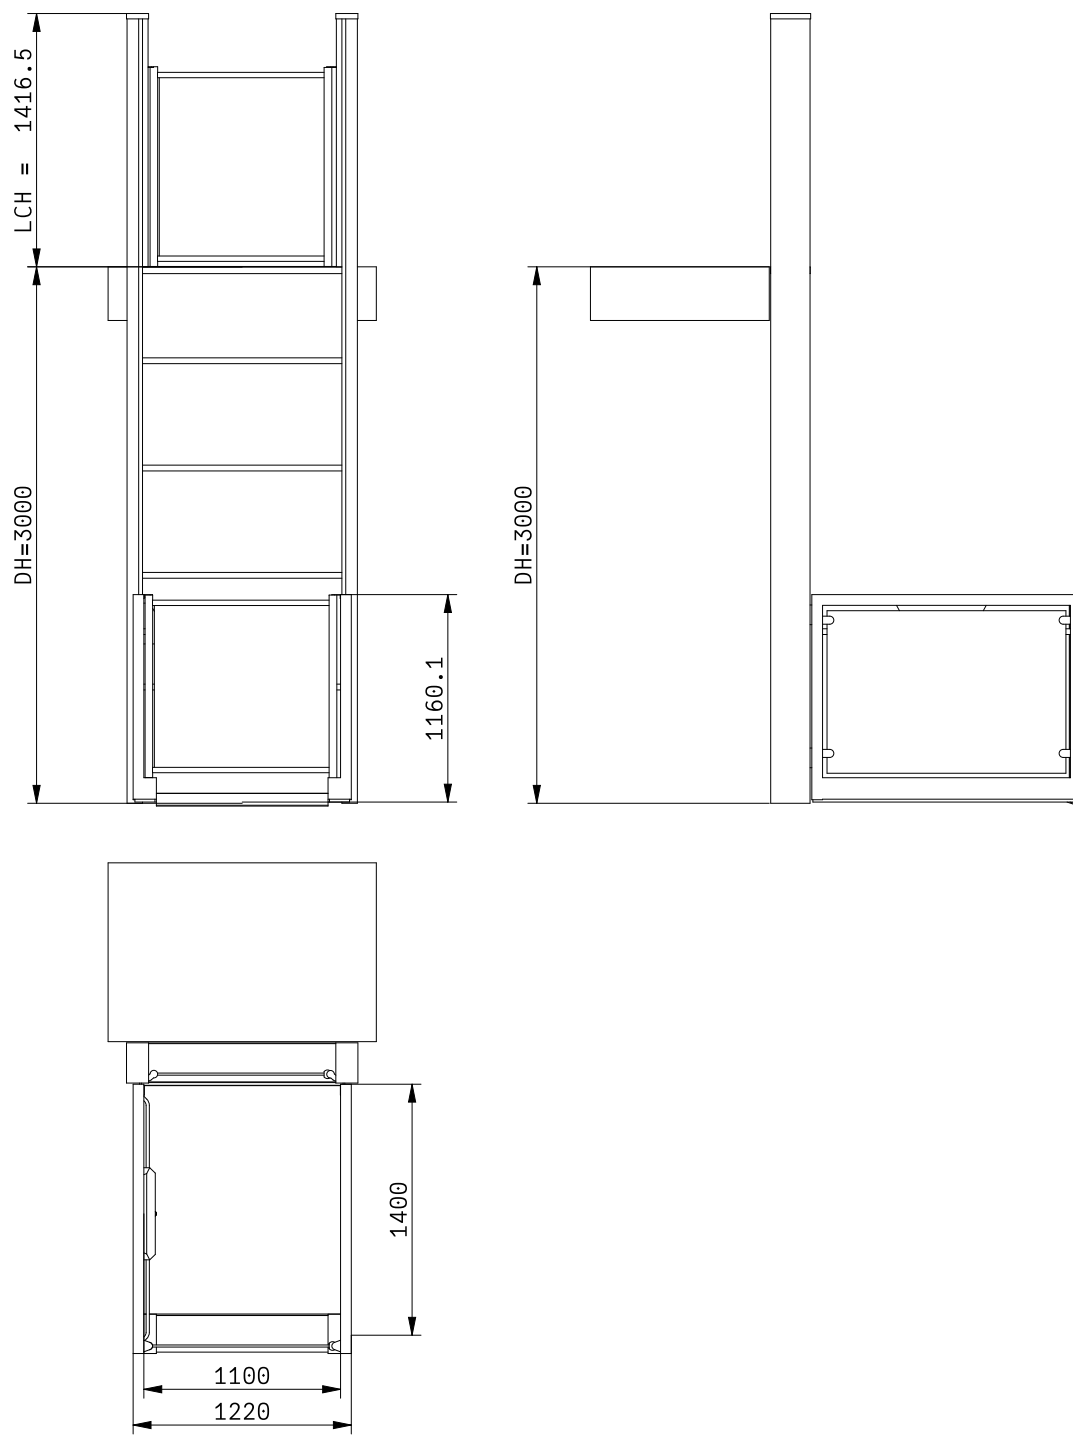



UnaPorte
PLATFORM VERTICALLIFT

TECHNICAL DATA:



Artikelnummer	UnaPorte-3000-L-Y-L-Y-N-IMINN-N-N-Y-N-N-N-N-N-N-N-N-RAL 9023-1400x1100
Projektets namn	Sample drawing
Leveransadress	
namn	UnaPorte
Reshöjd [mm]	3000
Information om lyfthöjden	UP standardhöjd
Plattformens storlek [mm]	1400x1100
Bilversion	Genomgående lastare
Dörrgångjärn bil	DIN-L
Automatisk dörröppnare för dörr på bil	Ja
Lyftpelare för dörrgångjärn	DIN-R
Automatisk dörröppnare för dörr i lyftpelare	Ja
Förlängd påkörningsramp på bil	Nej
Information om påfartsramp	max. tillåten lutning på den nedre landningsnivån 0,5
Plats för installation	invändig, ej väderbeständig
område bakom lyftpelare	ingen vägg med full yta på plats
område bakom lyftpelare info	Beklädnad av bakre vägg krävs av säkerhetsskäl
Beklädnad av bakre vägg	Ja
utgång övre landning	endast tröskel (skjuter inte ut i den övre trappavsatsen)
utgång övre landning info	Avståndet mellan lyftpelaren och den övre utgången får inte vara större än 10 mm
Fritt placerad pelare för fastsättning av väggströmbrytaren	Nej
SMS fjärrförfrågan inkl. nödsamtal via GSM röstanslutning (exklusive SIM-kort)	Nej
Röstutmatning	Nej
Säkerhetskontaktlist på bilen	Nej
Säkerhetskontakt bandinfo	Säkerhetskontaktlist är nödvändig om avståndet mellan bilen och klippunkten är mindre än 350 mm.
Indirekt RGB LED-belysning på bilen	Nej
EuroKey nyckelbrytare istället för standard nyckelbrytare	Nej
Styrenhet på båda sidor av bilen istället för på en sida	Nej
Stödstång för extra kontrollpunkt	Nej
Plattformsposition (endast för visualisering)	Botten
Öppna/stäng lyftpelare (endast för visualisering)	nära
Öppna/stänga bilen (endast för visualisering)	nära
Detaljeringsnivå för CAD-data	300
Stoppar	2 hållplatser
Körhastighet [m/s]	upp till 0,15
Nyttolast [kg]	385
färg	Standard - Metallgrå
Utrymmesbehov / yttre mått	1736 x 1294 mm med stängd drivkorg
Valfri uppgift som ska fyllas i av användaren	...
Länk	KOMPAKT ALLROUNDMASKIN FÖR ENKEL EFTERMONTERING



UnaPorte
PLATFORM VERTICALLIFT

ORDER PLACEMENT

Production approval and order placement:

I hereby order the lift system as shown on the drawing and confirm that the configuration and all details are correct. Ascendor is not responsible for errors which are due to incorrect measurements and will not be liable for any costs arising therefrom. All deliveries and services are provided exclusively on the basis of our "General Terms and Conditions" and the current UnaPorte price list and/or the associated quotation, which you are aware of and which are hereby legally deemed to be agreed. The goods remain our property until full payment has been made.

You can read our General Terms and Conditions on our website www.ascendor.at.

date, sign

Essential requirements to be provided on-site before installation begins:

1. Electrical requirements

Operational power supply cable

1x 230V/N/PE 50Hz Nominal power 150W. Fuse protection in accordance with local regulations and selected cross-section (recommendation 1.5mm²).

Power supply cable to lifting column, free cable end 1.5m (see Ascendor factory drawing for position).

The electrical connection of the supply cable must be checked by a specialist after installation in accordance with applicable national standards and regional regulations and is only approved for temporary operation.

Potential equalization

Flexible min. 10 mm² (with M8 or M10 cable lug) to lifting column; free cable end 1.5 m

Maximum grounding resistance: 5 ohms

2. Structural requirements

-Frost-proof strip foundation or similarly load-bearing substrate directly underneath the lifting column. Construction to be capable of accepting the imposed forces as specified in our factory drawings.

-Two anchoring possibilities at the upper stop. Position and bearing forces see factory drawing

In addition, the "on-site requirements UnaPorte" apply in the respective current version.